



Barwon

Hudson

# Order Form: Barwon & Hudson Lift Chair

Prepared by \_\_\_\_\_  
 Client Name \_\_\_\_\_  
 Order Date \_\_\_\_\_  
 Reference No. \_\_\_\_\_

Circle required dimensions and configurations

## CONFIGURATION

Mechanism	Single Motor (Standard)	Dual Motor	180kg Dual Motor <b>RC</b>	Electric Recline <b>RC</b>	Manual Recline <b>CP</b>	Rocker Manual Recline <b>CP</b>
Wheels	50mm Castors (Standard)	75 Mobile Castors (+25mm Seat height)		Glides	Remove Castors on Site	
Memory Foam	Seat	Legrest	Backrest	Armrest	Hygroflex	
Back Cushion Options	Gluteal Recess	Concave Back	Blow-fill Lumbar	Comfort Pack	Heat & Massage	
Cushion Insert	None (Standard)	18x16 Low Profile	18x16 High Profile	16x16 Low Profile	16x16 High Profile	Include Infill Plug
Controller Option	Right (Standard)	Left	Double Pocket	Joystick	Controller Loop Left/Right	
Back Angle	Standard		Vertical		Over-Vertical	
Other Options	Waterfall Arms		Scotch Guard		Flush Front	
	Tablet Arm Left/Right (default show wood removed)			Leg rest Side Walls		
	Full chair cover	Velcro armrest headrest covers	Loose armrest/headrest covers	Fitted armrest/headrest covers		
	Removable Headrest A B C D E (please circle one)			24V Full Battery Backup		

## DIMENSIONS

	Seat Depth (mm)	Seat Height (mm)	Back Height (mm)	Footrest Length (mm)	Scapular Height (mm)	Seat Width (mm)	Arm Height (mm)	Seat Foam (mm)
Decrease Size	-100 <sup>CP</sup> -150 <sup>CP</sup> -25 -50 -75	-30 <b>RC</b> -25	-120 <sup>CP</sup> -150 <sup>CP</sup> -180 <sup>CP</sup> -30 <sup>CP</sup> -60 <sup>CP</sup> -90 <sup>CP</sup>	-50 -25		-150 -50 -100	-60 -30	-20
<b>Mini Standard Size</b>	<b>455</b>	<b>456</b>	<b>636</b>	<b>N/A</b>	<b>429</b>	<b>540</b>	<b>199</b>	<b>N/A</b>
Increase Size	+25 +50 +75	+20	+30 +60 +90 +120 +150 <sup>DM</sup>	+25 +50		+50	+30 +60	+20
Decrease Size	-100 -150 <sup>CP</sup> -25 -50 -75	-30 <b>RC</b> -25	-120 <sup>CP</sup> -150 <sup>CP</sup> -180 <sup>CP</sup> -30 <sup>CP</sup> -60 <sup>CP</sup> -90 <sup>CP</sup>	-50 -25		-150 -50 -100	-60 -30	-20
<b>A Standard Size</b>	<b>490</b>	<b>476</b>	<b>647</b>	<b>N/A</b>	<b>440</b>	<b>540</b>	<b>180</b>	<b>N/A</b>
Increase Size	+25 +50 +75	+20	+30 +60 +90 +120 <sup>DM</sup> +150 <sup>DM</sup>	+25 +50		+50	+30 +60	+20
Decrease Size	-100 -150 <sup>CP</sup> -25 -50 -75	-30 <b>RC</b> -25	-120 <sup>CP</sup> -150 <sup>CP</sup> -180 <sup>CP</sup> -30 <sup>CP</sup> -60 <sup>CP</sup> -90 <sup>CP</sup>	-50 -25		-150 -50 -100	-60 -30	-20
<b>B Standard Size</b>	<b>520</b>	<b>496</b>	<b>688</b>	<b>N/A</b>	<b>481</b>	<b>540</b>	<b>190</b>	<b>N/A</b>
Increase Size	+25 +50	+25	+30 +60 <sup>DM</sup> +90 <sup>DM</sup> +120 <sup>DM</sup> +150 <sup>DM</sup>	+25 +50		+50	+30 +60	+20
Decrease Size	-100 -150 -25 -50 -75	-30 <b>RC</b> -25	-120 <sup>CP</sup> -150 <sup>CP</sup> -180 <sup>CP</sup> -30 <sup>CP</sup> -60 <sup>CP</sup> -90 <sup>CP</sup>	-50 -25		-150 -50 -100	-60 -30	-20
<b>C Standard Size</b>	<b>545</b>	<b>546</b>	<b>718</b>	<b>N/A</b>	<b>511</b>	<b>540</b>	<b>190</b>	<b>N/A</b>
Increase Size	+25	+25 +50	+30 <sup>DM</sup> +60 <sup>DM</sup> +90 <sup>DM</sup> +120 <sup>DM</sup>	+25 +50		+50	+30 +60	+20

NOTE: Reduced seat foam limits Safe working load to 90kg and reduces seat foam warranty to 2 years.

\* DM = Dual Motor Only \* RC = Remove Castors -30mm Seat Height \* CP = Not compatible with Comfort Pack

## COLOUR AND FINISH

Fabric Inner \_\_\_\_\_  
 Outer \_\_\_\_\_  
 Show wood  Walnut  Mahogany  Baltic  Teak  Remove Show Wood


## ADDITIONAL NOTES

\_\_\_\_\_



# Chair Sizing

OUR RECOMMENDED STARTING POINT

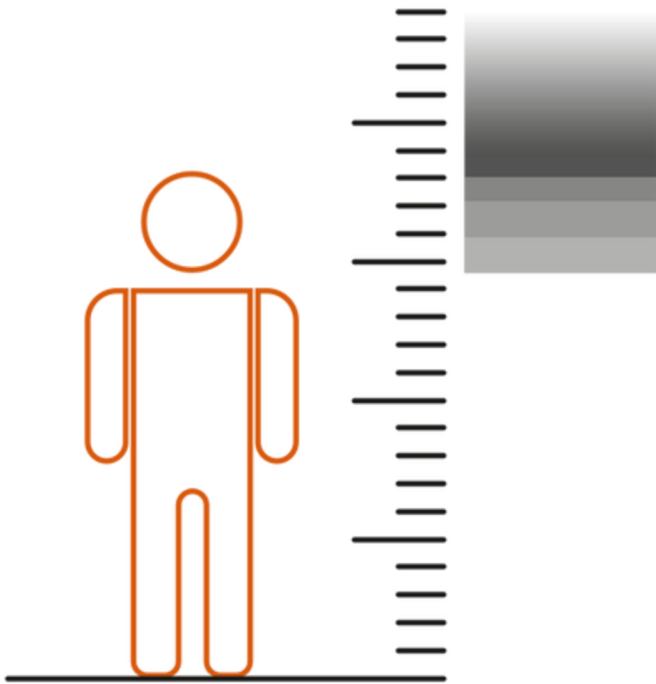

C	5'11+	180cm+
B	5'8 to 5'11	172 to 180cm
A	5'2 to 5'8	157 to 172cm
Mini	4'10 to 5'2	147 to 157cm

## ENSURING CORRECT MODIFICATIONS



- Heels up against the footrest
- Light pressure on the calf
- Feet planted on the ground, avoid legs angled too far forward
- Mention gluteal recess if user unable to sit back into the chair



- Nape of the neck sitting in centre of top cushion
- Shoulder blades sitting in gap of the top roll
- Adjustments can be made manually by repositioning backrest



- Knees in line with hips
- Feet planted on the ground
- Even pressure from their backside to the back of their legs
- Use blocks to determine adjustment if feet don't reach the ground



- Elbow to wrist should be supported
- If shoulders are hunched up, arms too high
- Gap between armrest and elbow, arms too low



- Fit a fist beside each thigh comfortably
- Waterfall arms can also decrease seat width



- Heel clear of footrest to avoid pressure sores
- Ankles to be supported