

Barwon

Hudson

Order Form: Barwon & Hudson Lift Chair **Comfort Pack**

Prepared by

Client Name

Order Date

Reference No.

Circle required dimensions and configurations

**CONFIGURATION**

Mechanism	Single Motor (Standard)		Dual Motor		180kg Dual Motor <span>RC</span>		Electric Recline <span>RC</span>					
Wheels	50mm Castors (Standard)		75 Mobile Castors (+25mm Seat height)		Glides		Remove Castors on Site					
Memory Foam	Seat		Legrest		Backrest		Armrest		Hygroflex			
Cushion Insert	None (Standard)		18x16 Low Profile		18x16 High Profile		16x16 Low Profile		16x16 High Profile		Include Infill Plug	
Controller Option	Right (Standard)		Left		Double Pocket		Joystick		Controller Loop Left/Right			
Back Angle	Standard				Vertical				Over-Vertical			
Other Options	Waterfall Arms				Scotch Guard				Flush Front			
	Tablet Arm Left/Right (default show wood removed)					Leg rest Side Walls						
	Full chair cover			Velcro armrest/headrest covers			Loose armrest/headrest covers			Fitted armrest/headrest covers		
	Removable Headrest A B C D E (please circle one)					24V Full Battery Backup						

**DIMENSIONS**

	Seat Depth (mm)	Seat Height (mm)	Back Height (mm)	Footrest Length (mm)	Scapular Height (mm)	Seat Width (mm)	Arm Height (mm)	Seat Foam (mm)
Decrease Size	-100 -150	-30 <b>RC</b>		-50		-150	-60	
	-25 -50 -75	-25		-25		-50 -100	-30	-20
Mini Standard Size	455	456	636	N/A	429	540	199	N/A
Increase Size	+25 +50	+20	+30 +60 +90	+25		+50	+30	+20
	+75		+120 +150 <b>DM</b>	+50			+60	
Decrease Size	-100 -150	-30 <b>RC</b>		-50		-150	-60	
	-25 -50 -75	-25	-30	-25		-50 -100	-30	-20
A Standard Size	490	476	647	N/A	440	540	180	N/A
Increase Size	+25 +50	+20	+30 +60 +90	+25		+50	+30	+20
	+75		+120 <b>DM</b> +150 <b>DM</b>	+50			+60	
Decrease Size	-100 -150	-30 <b>RC</b>	-60	-50		-150	-60	
	-25 -50 -75	-25	-30	-25		-50 -100	-30	-20
B Standard Size	520	496	688	N/A	481	540	190	N/A
Increase Size	+25	+25	+30 +60 <b>DM</b> +90 <b>DM</b>	+25		+50	+30	+20
	+50		+120 <b>DM</b> +150 <b>DM</b>	+50			+60	
Decrease Size	-100 -150	-30 <b>RC</b>	-90	-50		-150	-60	
	-25 -50 -75	-25	-30 -60	-25		-50 -100	-30	-20
C Standard Size	545	546	718	N/A	511	540	190	N/A
Increase Size	+25	+25	+30 <b>DM</b> +60 <b>DM</b>	+25		+50	+30	+20
		+50	+90 <b>DM</b> +120 <b>DM</b>	+50			+60	

NOTE: Reduced seat foam limits Safe working load to 90kg and reduces seat foam warranty to 2 years.


\* **DM** = Dual Motor Only \* **RC** = Remove Castors -30mm Seat Height**COLOUR AND FINISH**

Fabric	Inner					
	Outer					
Show wood		Walnut	Mahogany	Baltic	Teak	Remove Show Wood

**ADDITIONAL NOTES**

# Chair Sizing

OUR RECOMMENDED STARTING POINT

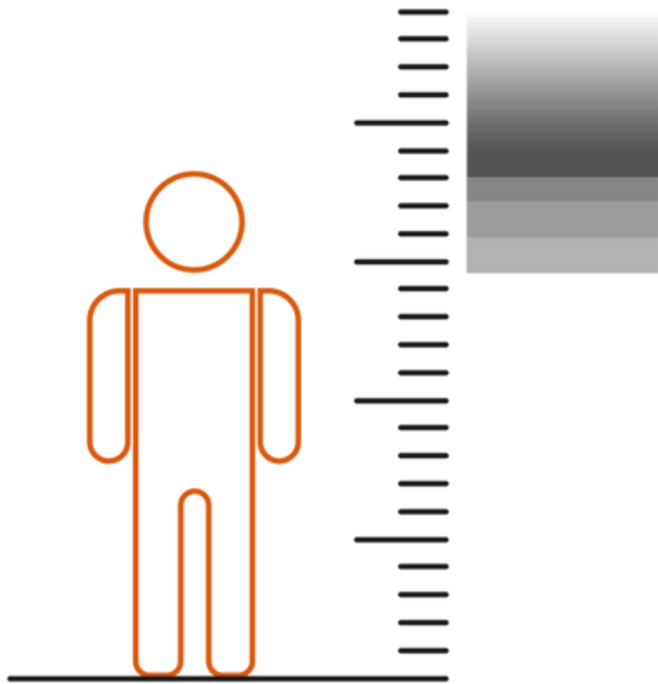

C	5'11+	180cm+
B	5'8 to 5'11	172 to 180cm
A	5'2 to 5'8	157 to 172cm
Mini	4'10 to 5'2	147 to 157cm

## ENSURING CORRECT MODIFICATIONS



Seat Depth

- Heels up against the footrest
- Light pressure on the calf
- Feet planted on the ground, avoid legs angled too far forward
- Mention gluteal recess if user unable to sit back into the chair



Back Height

- Nape of the neck sitting in centre of top cushion
- Shoulder blades sitting in gap of the top roll
- Adjustments can be made manually by repositioning backrest



Seat Height

- Knees in line with hips
- Feet planted on the ground
- Even pressure from their backside to the back of their legs
- Use blocks to determine adjustment if feet don't reach the ground



Arm Height

- Elbow to wrist should be supported
- If shoulders are hunched up, arms too high
- Gap between armrest and elbow, arms too low



Seat Width

- Fit a fist beside each thigh comfortably
- Waterfall arms can also decrease seat width



Footrest Length

- Heel clear of footrest to avoid pressure sores
- Ankles to be supported